

LSE Interior Mobile Ramps Angle 10 With Stainless Steel Treads 1000mm


Specifications :

Price	Contact Us
Brand Name	SE
Min.Order Quantity	1 set
Payment Terms	T/T, L/C, Western Union, etc.
Delivery Detail	10-25 working days.
Packaging Details	Wooden case or wooden pellets depended on clients' require

Detail Introduction :

Control system



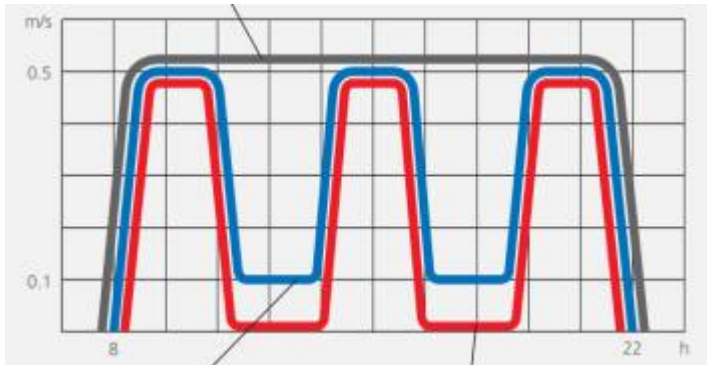

Standard configuration: power frequency operation
 Optional configuration: high and low speed frequency conversion
 Automatic start frequency conversion
 Traction machine



Characteristics: Specific motor for escalator. Powerful, reliable and high performance.
 Indoor protection level: IP21?IP44
 Outdoor protection level: IP55
 Worm gear
 Smooth tooth surface structure
 Noise and vibration reduction.
 Location?At the top head.

Handrail



Commercial staircases use high-strength, flame-retardant antibacterial handrails. With breaking strength not less than 25 kN.

Handrail material: synthetic rubber
 Anti-aging agent
 Daily cleaning

Technical Data

Item	Mobile ramp
Model	HO-FSRM
Angle	10°/11°/12°
Speed	0.5m/s
Step width	800mm/1000mm
Height	?6000mm

FAQ

1. Price

Re: send us an inquiry by mail, we will reply you within 24 hours. It is more convenient and appreciated for us if you provide your company details and detailed inquiry for elevators.

2. Payment term

Re: T/T

3. Installation and maintenance

Re: We will send the installation and maintenance manual together with the elevator.

Our question is to hire a professional local company for installation and future maintenance, Once you need our technical assistant, please feel free to contact us by mail or phone.

A technician will be sent to the job site if necessary.

4. Shipping terms and price

Re: Both FOB / CIF / CFR price terms are available, we have a reliable forwarder to help arrange the shipment for you.

Please send your message to this supplier.

Photos of the ramp factory

